
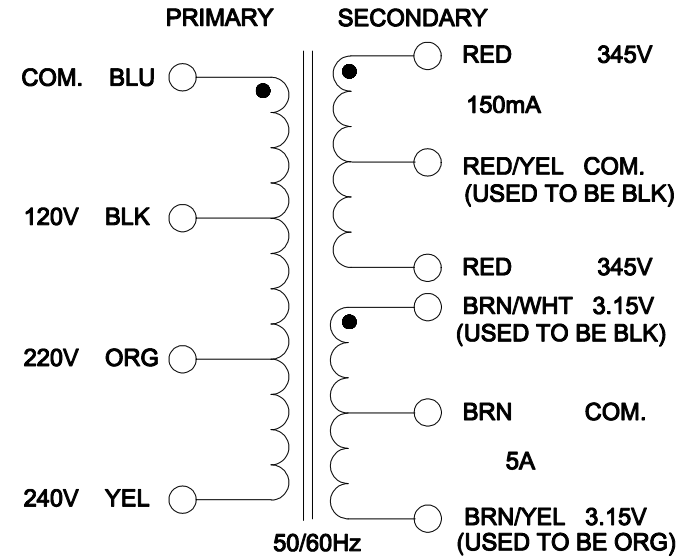


DIMENSIONS:	
A	4.500" ±0.063
B	3.750" ±0.063
C1	1.850" ±0.063
C2	3.900" ±0.125
D	3.750" ±0.063
E	3.000" ±0.063
G	1.000" ±0.250

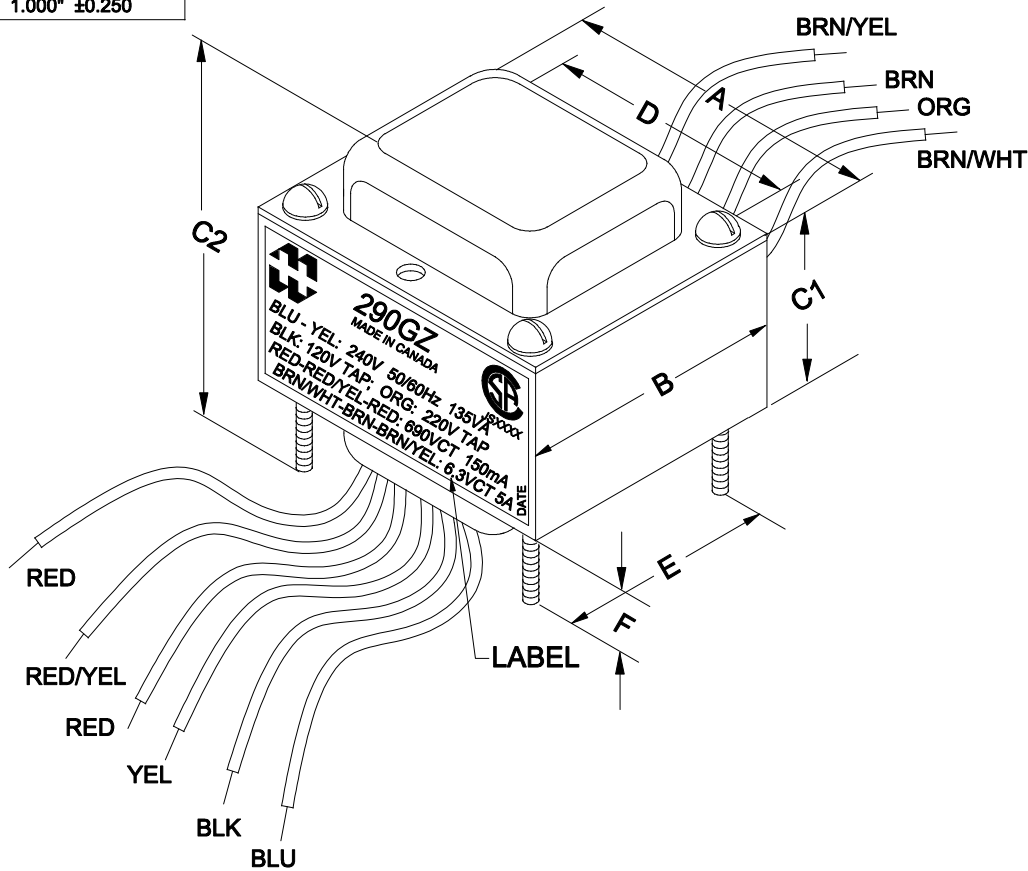

NOTE: ALL LEADS 20.0" MIN. OUT. STRIP 0.5"

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, BLU - BLK	473mA	Max.
Sec. N.L.V	@ 120V, 60Hz, BLU - BLK		
	BLU - ORG =	225.6V	±2%
	BLU - YEL =	247.5V	±2%
	RED - RED/YEL = RED/YEL - RED =	363.5V	±2%
	RED - RED =	727.0V	±2%
	BRN/WHT - BRN = BRN - BRN/YEL =	3.485V	±2%
	BRN/WHT - BRN/YEL =	6.971V	±2%
DCR	@ 20°C, BLU - YEL =	8.030 Ω	±20%
	@ 20°C, RED - RED =	91.50 Ω	±20%
	@ 20°C, BRN/WHT - BRN/YEL =	0.037 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE
0	RELEASED. C.I.	11/28/18

HAMMOND MANUFACTURING™ ELECTRONIC DIVISION
 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5
 PH # (519) 886-6181 FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 290GZ
DATE: 11/28/18	APP'D. BY:		
	DIMENSIONS: IN(X) MM()		